




> DOWN-CONDUCTORS AND ACCESSORIES

> ACCESSORIES

> FLEXIBLE BRAID BOND

This flexible braid allows an equipotential bond between diverse metal elements such as fences, doors and windows. Fixed using Ø11 mm holes.

Reference	Dimensions (mm)	Equivalent section (mm ²)	Material	Weight (g)
AT-001F	25 x 3.5 x 200	35	Tin-plated copper	80
AT-032J	25 x 3.5 x 400	35	Copper	150
AT-033J	33 x 4 x 180	50	Aluminium	30
Complies with UNE 21186, NF C 17-102, IEC 62305, IEC 62561				

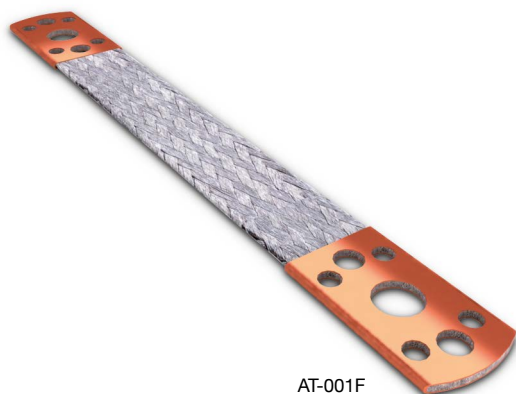

AT-001F



APPLICATION AT-001F