




> DOWN-CONDUCTORS AND ACCESSORIES

> CLIPS FOR CABLE

> NAVAL BRASS CABLE CLIP

Down-conductor clip for fixing round conductor or cable to flat surface.


AT-011E suitable to use on corners. The AT-009E includes screws and washers suitable for metal sheets or sandwich panels. AT-262E includes self-drill double screw and neoprene washer for metal structures. AT-013E and AT-014E are designed to avoid obstacles such as cornices.

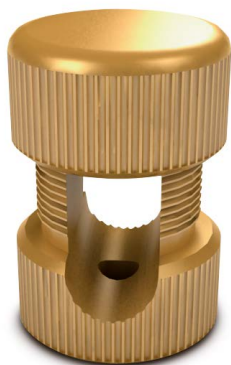

AT-010E

Reference	Dimensions (mm)	Conductor range		Conductor elevation (mm)	Includes	Material	Weight (g)
		Ø (mm)	mm ²				
AT-010E	24 x 32 x 24	6 - 10	25 - 70	7	Plug and lag bolt M6 x 25 mm	Naval brass	70
AT-009E	24 x 32 x 24	6 - 10	25 - 70	7	Self-drill screw + neoprene washer	Naval brass	70
AT-262E	24 x 32 x 24	6 - 10	25 - 70	7	Self-drill double screw + neoprene washer	Naval brass	70
AT-011E	24 x 32 x 24	6 - 10	25 - 70	7	Plug and lag bolt M6 x 25 mm	Naval brass	65
AT-013E	24 x 82 x 24	6 - 10	25 - 70	57	Plug and lag bolt M8 x 40 mm	Naval brass	245
AT-014E	24 x 132 x 24	6 - 10	25 - 70	107	Plug and lag bolt M8 x 40 mm	Naval brass	435
AT-025E	30 x 30 x 40	13	95	10	Plug and lag bolt M8 x 40 mm	Naval brass	165


Complies with UNE 21186, NF C 17-102, IEC 62305, IEC 62561

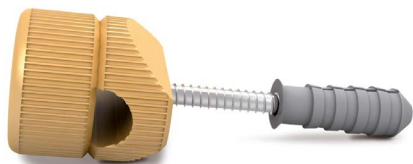


AT-011E



APPLICATION AT-009E



APPLICATION AT-010E

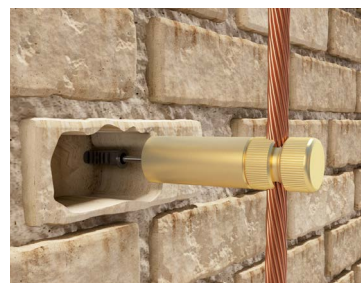

APPLICATION AT-013E