




> DOWN-CONDUCTORS AND ACCESSORIES

> ACCESSORIES

> EXPANSION UNIT

For thermal expansion of longer conductors. Suitable to install it each 20 m. If the down-conductors are made of copper, use a bimetal clamp such as AT-128F (table 94).

Reference	Dimensions (mm)	Material	Weight (g)
AT-012G	400 x 100 x 8	Aluminium	80
Complies with UNE 21186, NF C 17-102, IEC 62305, IEC 62561			

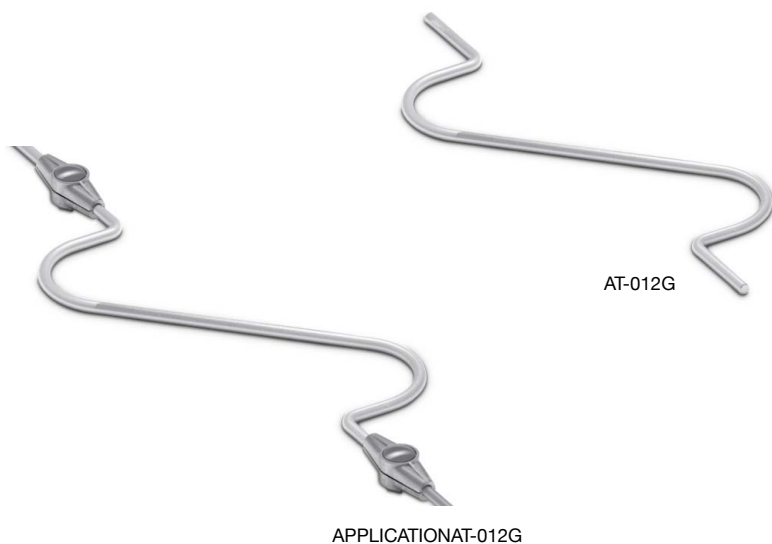

AT-012G

APPLICATIONAT-012G