




> INTERCEPTION SYSTEMS AND ACCESSORIES

> MASTS AND ANCHORAGES

> SELF-SUPPORTED TOWER

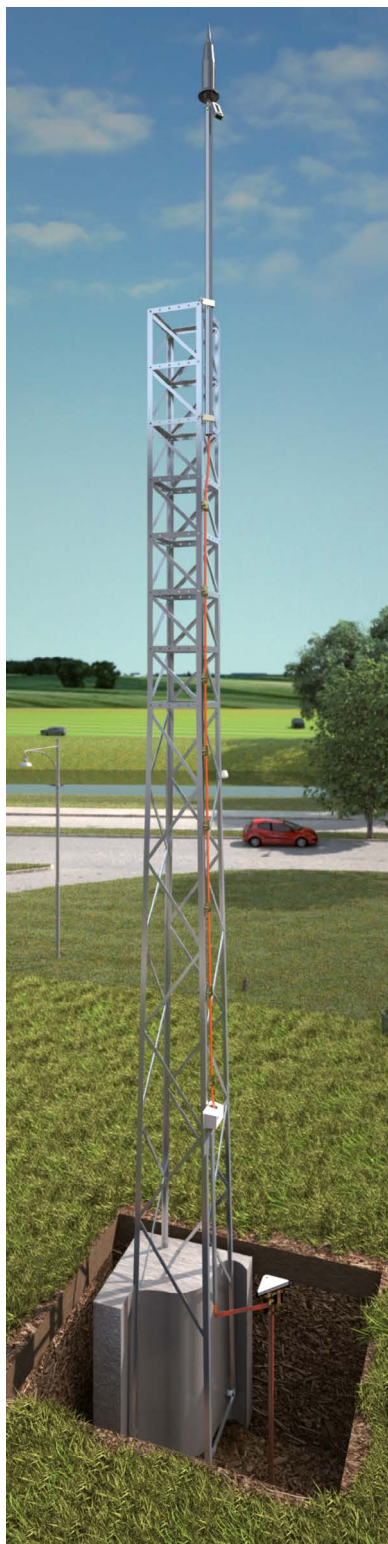

1½" elevation fixture up to 26 m. Particularly suitable where welding work is not allowed. The total height from ground includes the tower + 6 m mast that is provided.

INSTALLATION

First of all, a hole for the foundation has to be made (the dimensions of the hole depend of the height of the tower).

The first section has to be embedded in the hole. Wait for the concrete to harden. The top of the concrete foundation needs a small slope to avoid water accumulating.

Reference	Height from ground (m)*	Dimensions	Dimensions of the foundations (m)	Material	Weight (kg)
AT-050C	14	0.73 x 0.73 x 8.5 m + 1½" x 5.5 m	0.9 x 0.9 x 1.85	Galvanized steel	300
AT-051C	16	0.8 x 0.8 x 10.5 m + 1½" x 5.5 m	0.95 x 0.95 x 1.95	Galvanized steel	390
AT-052C	18	0.87 x 0.87 x 12.5 m + 1½" x 5.5 m	1.02 x 1.02 x 2	Galvanized steel	460
AT-053C	20	0.95 x 0.95 x 14.5 m + 1½" x 5.5 m	1.1 x 1.1 x 2	Galvanized steel	560
AT-054C	22	1 x 1 x 16.5 m + 1½" x 5.5 m	1.15 x 1.15 x 2.05	Galvanized steel	630
AT-055C	24	1.1 x 1.1 x 18.5 m + 1½" x 5.5 m	1.25 x 1.25 x 2.05	Galvanized steel	725
AT-056C	26	1.15 x 1.15 x 20.5 m + 1½" x 5.5 m	1.3 x 1.3 x 2.1	Galvanized steel	800

Complies with UNE 21186, NF C 17-102

Other dimensions, please contact us

APPLICATION AT-050C