



> DOWN-CONDUCTORS AND ACCESSORIES

> CONDUCTORS


> STRANDED ELECTROLYTIC COPPER CABLE

Stranded cable is easier to install than solid round conductor.

Reference	Dimensions (mm ²)	Stranded (mm)	Weight (kg/m)
AT-035D	35	7 x Ø2.5	0.40
AT-050D	50	19 x Ø1.8	0.47
AT-070D	70	19 x Ø2.2	0.65
AT-095D	95	19 x Ø2.5	0.85
AT-120D	120	37 x Ø2	1.10
AT-150D	150	37 x Ø2.3	1.34

Complies with UNE 21186, NF C 17-102, IEC 62305, IEC 62561

Other dimensions, please contact us

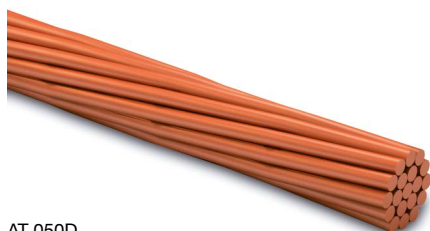

AT-050D