





> EARTH CLAMPING

> T AND L CLAMP

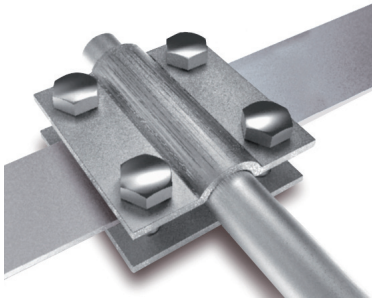

■ APPLICATION AT-015J (GS - galvanized steel)
■ AT-017J (Cu - copper)
■ AT-016J (SS - stainless steel)



■ AT-136J (GS - galvanized steel)
■ AT-137J (SS - stainless steel)
■ AT-138J (Cu - copper)

T and L-shape earth clamp for connection between cable, round bar or tape and earth rod.

Reference	Dimensions (mm)	Earth rod	Range		Material	Weight (g)
			Round	Tape		
AT-136J	60 x 60 x 22	Ø16 mm	Ø8 - 10 mm (50 - 70 mm ²)	-	Galvanized steel	330
AT-137J	60 x 60 x 22	Ø16 mm	Ø8 - 10 mm (50 - 70 mm ²)	-	Stainless steel	330
AT-138J	60 x 60 x 22	Ø16 mm	Ø8 - 10 mm (50 - 70 mm ²)	-	Copper	330
AT-015J	60 x 60 x 19	Ø16 mm	-	30 x 2 mm - 30 x 3.5 mm	Galvanized steel	330
AT-016J	60 x 60 x 19	Ø16 mm	-	30 x 2 mm - 30 x 3.5 mm	Stainless steel	330
AT-017J	60 x 60 x 19	Ø16 mm	-	30 x 2 mm - 30 x 3.5 mm	Copper	330

Complies with IEC 62305, IEC 62561, UNE 21186, NF C 17-102