





> DOWN-CONDUCTORS AND ACCESSORIES

> CONDUCTORS

> COPPER-STEEL BIMETAL CONDUCTOR

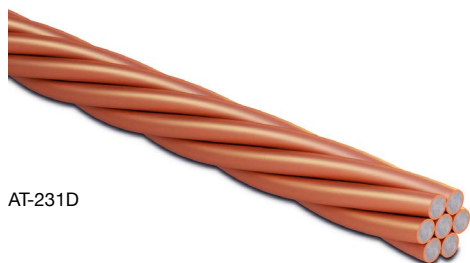

AT-231D

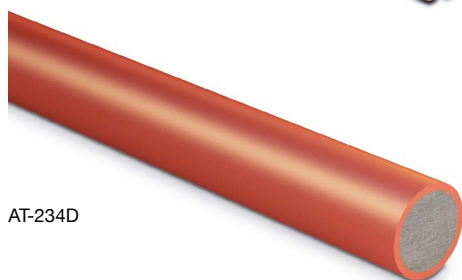

AT-234D

Copper-steel conductors (Cu 25%) maintain the electrical characteristics of the electrolytic copper, along with the best mechanical properties of steel.

Reference	Model	Dimensions (mm ²)	Weight (kg/m)
AT-230D	7 x Ø2.6 mm stranded cable	35	0.30
AT-231D	7 x Ø3.3 mm stranded cable	50	0.47
AT-232D	7 x Ø3.7 mm stranded cable	70	0.60
AT-233D	7 x Ø4.6 mm stranded cable	95	0.95
AT-234D	Ø7 mm round conductor	35	0.34
AT-235D	Ø8 mm round conductor	50	0.43

Complies with UNE 21186, NF C 17-102, IEC 62305, IEC 62561