



## &gt; DOWN-CONDUCTORS AND ACCESSORIES

## &gt; SUPPORTS


## &gt; GLAZING BAR HOLDFAST

Suitable for fixing any clip to narrow flanges such as metal profiles.

Suitable for use in conjunction with clips from tables 46, 47, 49, 53, 54, 56, 58, 59, 60, 61 or 65.

| Reference | Dimensions (mm) | Maximum width (mm) | Material         | Weight (g) |
|-----------|-----------------|--------------------|------------------|------------|
| AT-172E   | 20 x 15 x 35    | 12                 | Gunmetal         | 110        |
| AT-173E   | 20 x 15 x 35    | 12                 | Aluminium        | 50         |
| AT-018E   | 38 x 19 x 40    | 18                 | Galvanized steel | 85         |
| AT-174E   | 58 x 24 x 60    | 26                 | Galvanized steel | 220        |


Complies with IEC 62305, UNE 21186, NF C 17-102, IEC 62305, IEC 62561

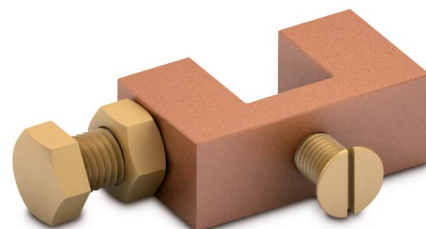


- AT-172E (Gu - gunmetal)
- AT-173E (Al - aluminium)



APPLICATION AT-172E

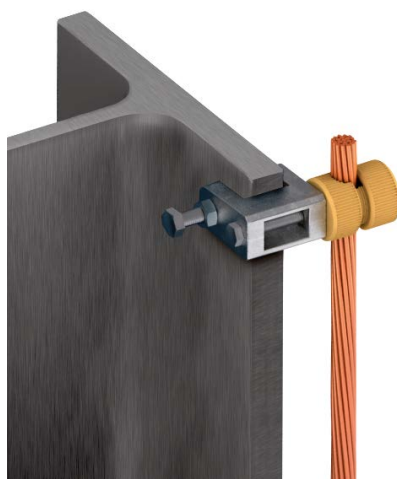

APPLICATION AT-018E

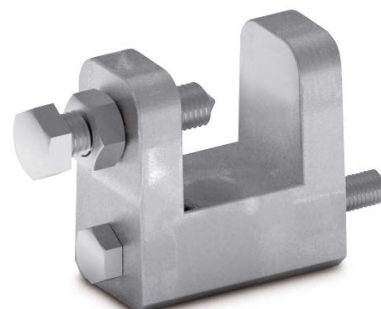

AT-018E