



> INTERCEPTION SYSTEMS AND ACCESSORIES

> MASTS AND ANCHORAGES

> ADJUSTABLE ANCHORAGE


Due to the covers or cornices of the roofs, a substantial horizontal distance needs to be avoided. In these cases it is necessary to use the extendible tube (60 to 80 cm).

The anchorages require a minimum of 60 cm between each other in order to ensure they are correctly fixed.

Single supports: ref. AT-077B

Reference	Dimensions (mm)	Includes	Material	Weight (kg)
AT-078B	2 x (300 x 450 x 800)	2 supports	Galvanized steel	14
AT-079B	3 x (300 x 450 x 800)	3 supports	Galvanized steel	21

Complies with UNE 21186, NF C 17-102

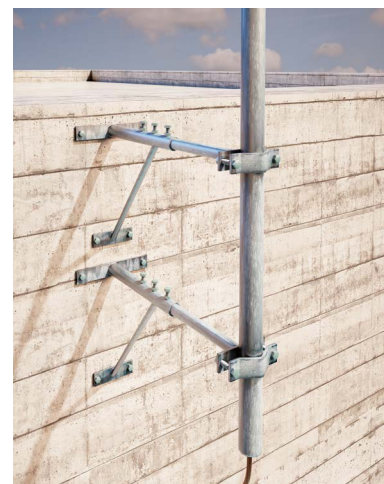

APPLICATION AT-078B